Clam dredge commonly used in the Thimble Islands region. Thimble Islands in background.

Typical oyster dredge

Clam dredge on top, oyster dredge on deck. Thimble Islands in background.

Clam dredge being deployed.

Full clam dredge.

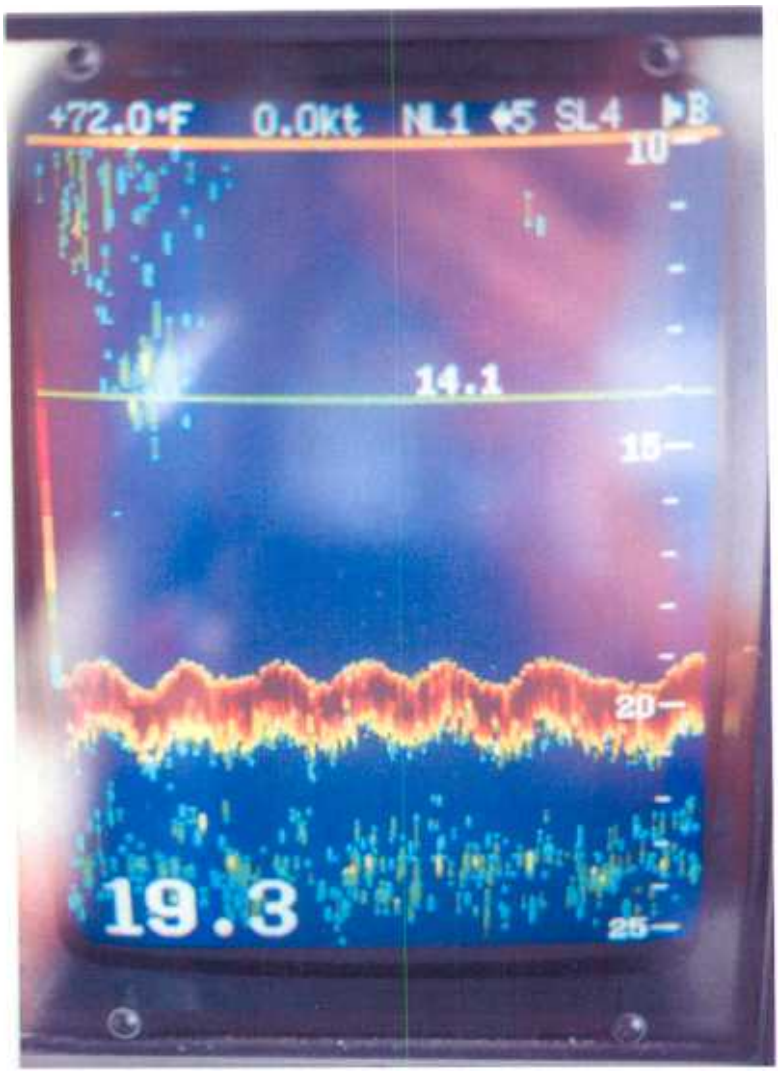

Photo of bottom profile image taken six years after the Iroquois pipe installation. The substrate 'moguls' left on the bottom are about one foot deep and significant enough for harvesters to avoid the area.

NOTE: NOT TO SCALE

SIDE VIEW

CLAM DREDGE
January 2004
Prepared by
Lawrence Williams

AVERAGE TOW SPEED – .8 TO 1.5 KNOTS

AVERAGE WATER PRESSURE AT PUMP – 25 TO 35 lbs.

MANIFOLD BOTTOM NOZZLES – 3/8" PIPE. 2" LONG

WEIGHT – 350 lbs. ON LAND

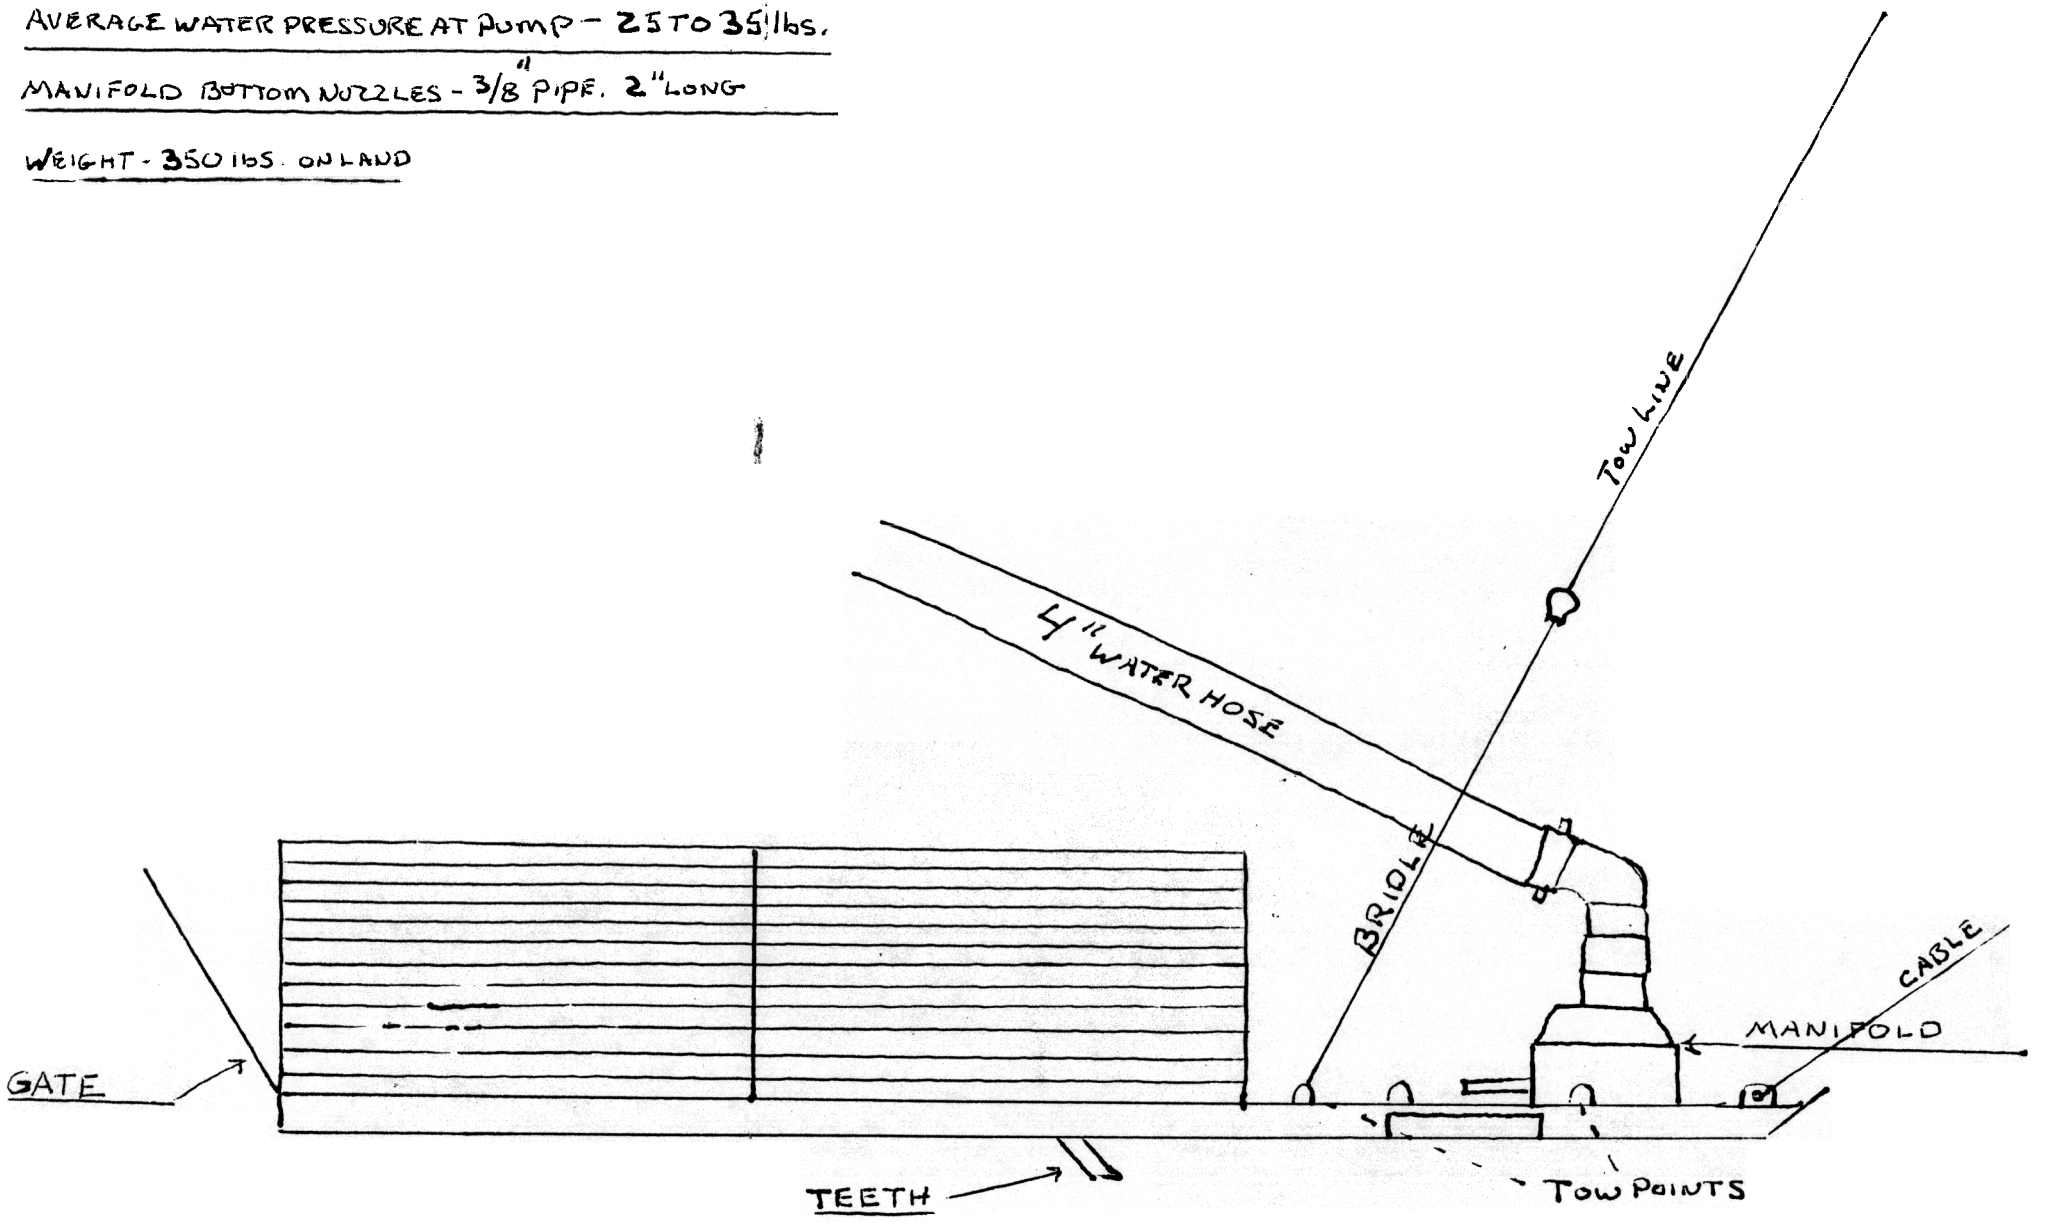

NOT
NOT TO SCALE

TOP CAGE REMOVE
FOR [illegible]R

TOP VIEW
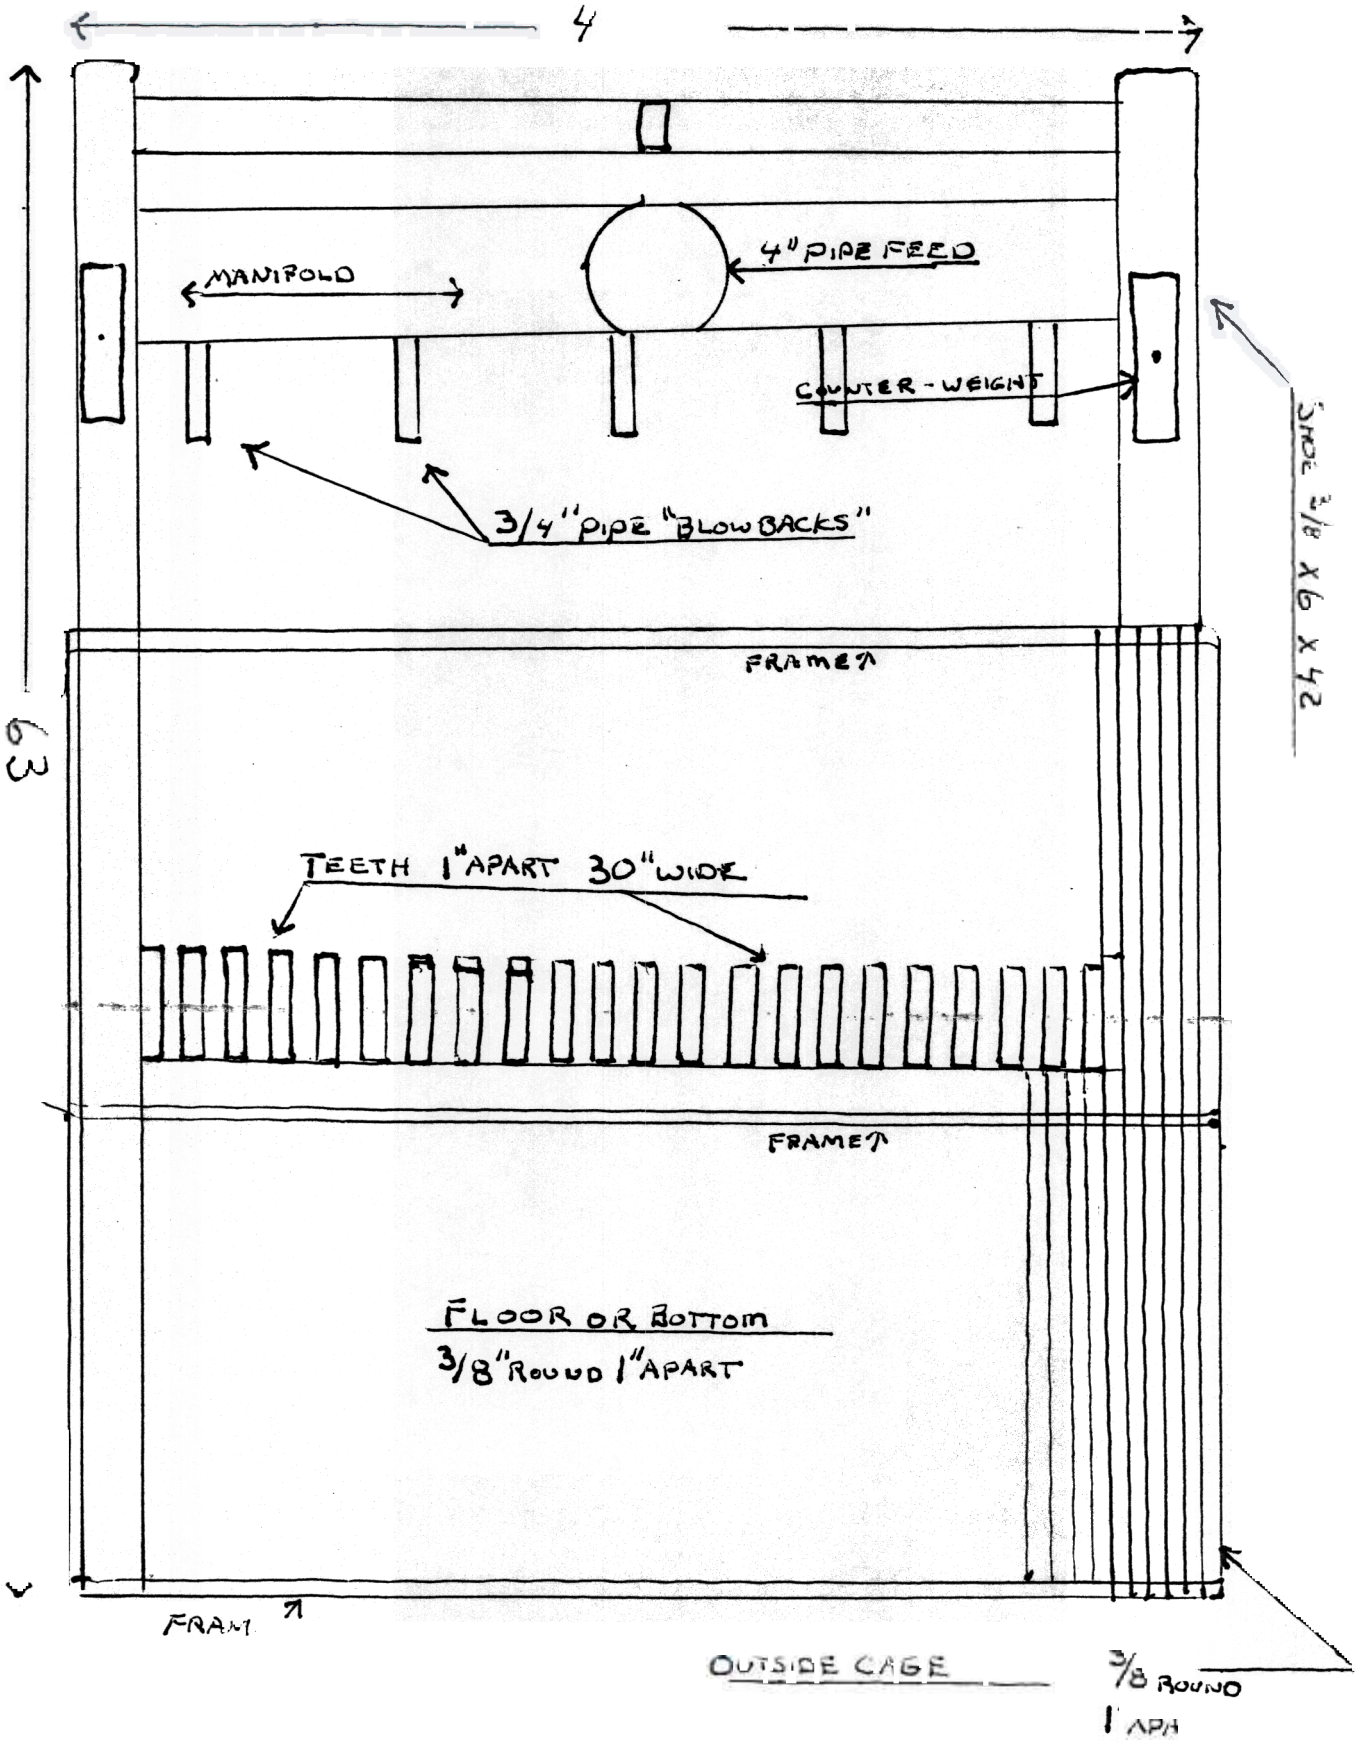
CLA 1 DR DGE
[illegible] 200
Prepared by
[illegible]